



LIVING IN THE MOMENT


The games last for hours, but what we remember is the moment. It may be the expanse of the stadium, the crowd, the field reveals itself. It may be a corner kick, a goal that makes 50,000 people stand and cheer. Moments like these are what sports fans live for. Come inside—your moment.



SAFETY STEEL DOORS

SAFETY STEEL DOORS

STEEL DOORS AND ACCESSORIES

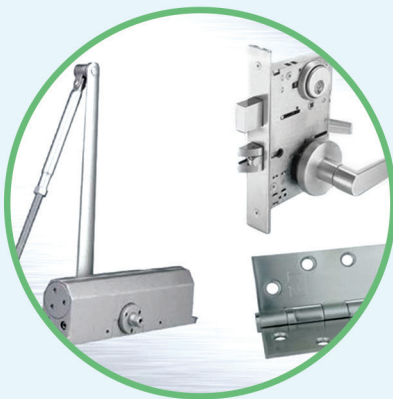

ACCESSORIES

ASSA ABLOY



CERTIFICATE OF APPROVAL No CF 5091

This is to certify that, in accordance with
TS00 General Requirements for Certification of Fire Protection Products
The undermentioned products of

TALLERES DE ESCORIAZA S.A.U.

Bo Ventas, 35 E-20305 Irun (Guipuzcoa) Spain
Tel: +34 943 669100 Fax: +34 943 627230

Have been assessed against the requirements of the Technical Schedule(s)
denoted below and are approved for use subject to the conditions
appended hereto:

CERTIFIED PRODUCT
LITE Series Panic Exit Device
Series And QUICK Series Panic
Exit Device

TECHNICAL SCHEDULE
TS31 The Contribution of
Emergency Exit Devices to
the Fire Resistance of Door
Assemblies

Signed and sealed for and on behalf of Exova (UK) Limited trading as
Warrington Certification

Paul Duggan
Certification Manager



Issued: 26th July 2012
Reissued: 31st July 2017
Valid to: 30th July 2022

Page 1 of 5



Architectural Hardware Selection Process

Selection flow

Hang the Door

- Hinges
- Pivots
- Sliding Gear

Control the Door

- Door Closer
- Floor Spring
- Door Operator

Secure the Door

- Mortice Lock
- Cylinder
- Cylindrical Lockset

Trim the Door

- Lever Handle
- Pull Handle

Protect the Door

- Kick Plate
- Push Plate
- Door Seals

Signage + Miscellaneous Items

- Sign Plates
- Door Stops



Door Closer - Surface Mounted

DC110

ASSA ABLOY

Door Closer

DC110



Description:

- Rack and pinion door closer with link arm
- Certified in compliance with EN 1154, size 2/3/4
- For single action doors up to 1100mm



Characteristics:

- Can be used for left and right-handed doors
- Suitable for fire and smoke protection doors
- Closing and latching speed adjustable via regulating valves
- Thermodynamic valves for consistent performance
- Standard colours: Silver EV1; White, similar to RAL9016; Black, similar to RAL9005

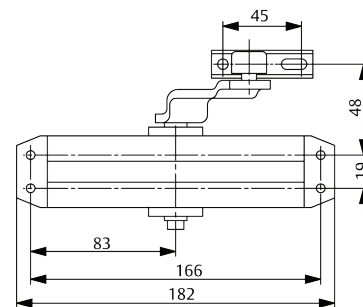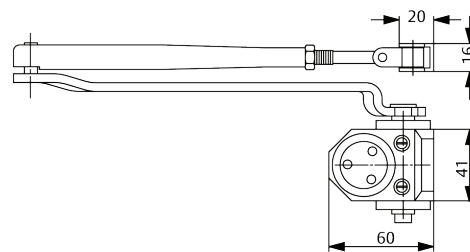

Door Closer

Technical details
for DC110

Technical details:

Closing force	EN2/3/4
Door width up to	1100mm
Fire and smoke protection	Yes
Door swing directions	Left / right handed
Closing speed	Variable between 180°-15°
Latching speed	Variable between 15°-0°
Weight	1.5kg
Height	41mm
Depth	60mm
Length	182mm
In compliance with	EN1154
CE marking for building products	Yes

SHAFT/DUCT ACCESS DOORS



FIRE RATED DOORS



Panic Exit Device Features & Benefits

Panic Exit Devices

Key features:

- Surface mounted
- Slim, neat design, surface mounted
- 200,000 cycles tested
- Fire rated
- Wide range of option

Benefits:

- Ease of installation
- Superior aesthetics
- High durability
- Suitable for fire rated doors
- External cylinder and lever option available

Standard

BS EN 1125

EN1634

Technical details:


- Cross and Push bar
- Modular type - stock reduction
- 1, 2, 3 locking point versions (vertical and lateral) - RIM
- For doors up to 1200 x 2400mm in standard
- Easy installation and adjustment
- Wide range of finishes
- Compatible accessories
- Wide range of outside trims
- Hold Open and Micro switch versions
- Glass door kit
- Certified according to EN 1125:2008
- Durability of 2,00,000 cycles
- For Fire Rated applications (not HO version)
- Suitable for single and double doors



This new range of product is based on a new modular concept and a common design, under a unique platform for both push and cross bar panic exit devices.



Handle on narrow plate

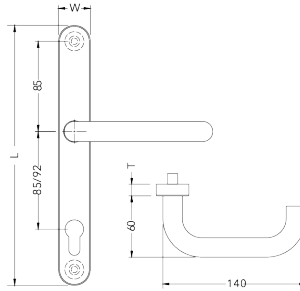

Model No.	L	W	T
AAL306	245	30	11.5


Model No.: AAL306

Description: Lever on narrow round plate
 Default lever handle: AAL201
 Handle version:
 any design from Solid & Tubular Handle series
 Spindle: 8mm x 8mm straight spindle standard
 Dim C: 72mm


Finish:
 Satin Stainless Steel
 Polished Stainless Steel

How to order:
 Product code + Lever handle code + Version +
 Finish
 Example: AAL307202PZSS

Optional versions

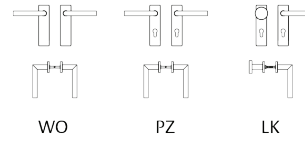

Handle on square plate

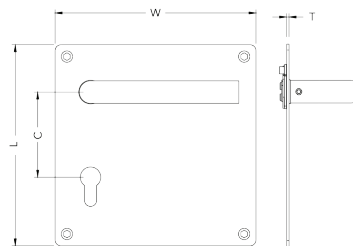

Model No.	L	W	T
AAL307	180	180	2


Model No.: AAL307

Description: Lever on square plate
 Default lever handle: AAL201
 Handle version:
 any design from Solid & Tubular Handle series
 Spindle: 8mm x 8mm straight spindle standard
 Dim C: 72mm

Finish:
 Satin Stainless Steel
 Polished Stainless Steel

How to order:
 Product code + Lever handle code + Version +
 Finish
 Example: AAL307202PZSS

Optional versions

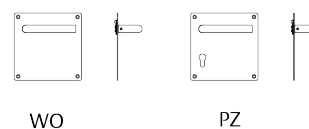



Hinges

*Make-Geze/Hettich/Dorma/
Kich*



Panic Bar

Make-Geze/Hettich/Dorma



D-Handle

*Make-Geze/Hettich/Dorma/
Kich*

ASSA ABLOY Middle East

ASSA ABLOY



Main Door Lock

*Make-Geze/Hettich/Dorset/
Kich*



Door Closer

*Make-Dorset/Geze/Hettich/
Dorma/Assa Abloy/Kich*



Mortise

Dead Lock

*Make-Geze/Hettich/Dorma/
Kich*



SAFETY STEEL DOORS


All UL certified hardware included



Marks: Door coordinator/Flush bolt is available for double door:

FIRE DOOR LOUVER

Safety in Quality

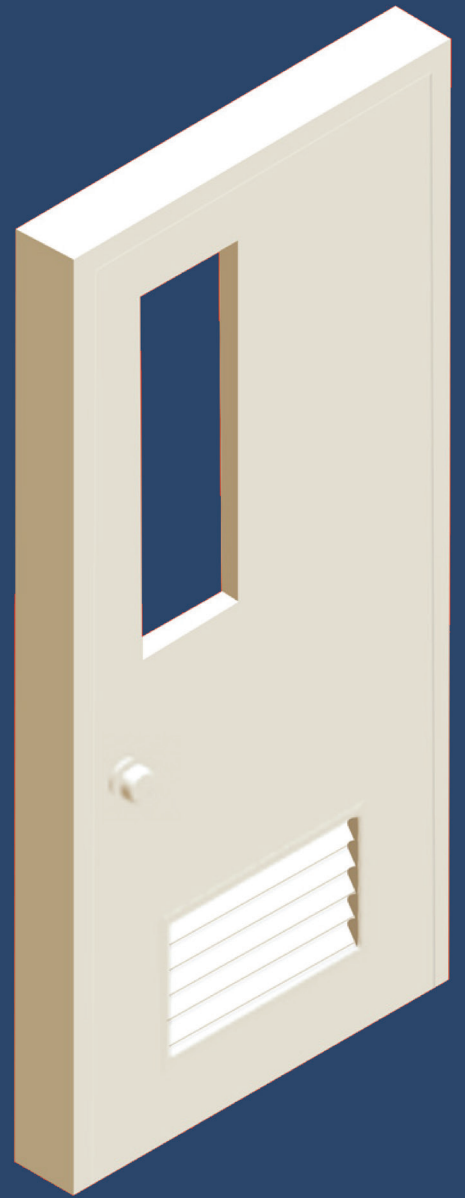



SAFETY STEEL DOORS

Ahmed Elhamy

0118717683

safetysteeldoors.eg@gmail.com

ahmedelhamy2020@yahoo.com